


SPECIFICATION TYPE : 12VX



Customer.  
 Customer's Dwg. Number \_\_\_\_\_ Rev. \_\_\_\_\_  
 Customer's Part Number \_\_\_\_\_  
 Toko Sample Number **707VX-A042YUK**


Approved by \_\_\_\_\_  
**FOR REFERENCE ONLY**  
 Signature \_\_\_\_\_ Date \_\_\_\_\_

One copy with your signature is required as your confirmation to our Specifications.

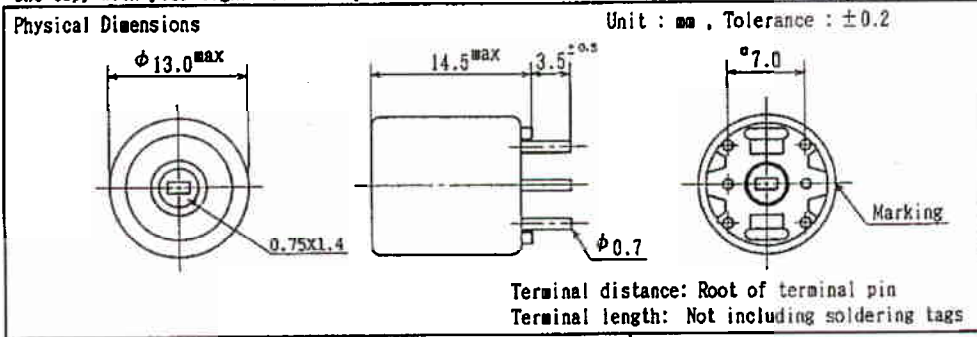

	Customer's Specifications	Toko's Specifications
Center Frequency (Fc)		125kHz
Tuning Range ( 4 - 3 )		33000pF ± 6%
Unloaded Q ( 4 - 3 )		25 min

Marking	Customer's Specifications		Toko's Specifications		Wire(mm)
	Number of turns	Wire(mm)	Number of turns	Wire(mm)	
			4 - 3	49½	0.16
			5 - 6	7	
			5 - 2	3½	
			2 - 1	1	
			1 - 6	2½	

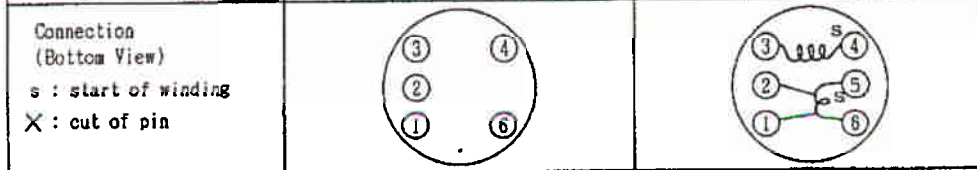

**Dielectric With Standing Voltage.**  
 Samples shall be subjected to 100V DC between primary and secondary.  
 Samples should have no apparent defects.

**Insulation Resistance.**  
 Samples shall be subjected to 100V DC between primary and secondary.  
 Insulation resistance should be greater than 100 MΩ.

Notes 1. Above sample is modified from Toko Sample No.

Approved by:	Checked by:	Made by:	Orig	21-AUG-1997	
H. OHTSUKA	LAI HO CHING	LAI WAI CHUN	Issues		Sign

45, Hoi Yuen Road, Yau Lee Centre, 8/F.,  
 Kwun Tong, Kowloon, Hong Kong.

